


PUMP AND MOTOR DATA

n (rpm):	2900	Motor phase:	3~
Max working pressure (bar):	16	Un (V):	230/400
H max (m):	62.00	fn (Hz):	50
H min (m):	38.00	Poles:	2
Q min (mc/h):	2.40	In (A):	9.2 / 5.3
Q max (mc/h):	8.40	PF:	0.81
Pn (kW):	2.20	Insulation class:	F
Pn (HP):	3.00	Duty:	S1
Impeller diameter (mm):	156.00	Min liquid temperature (°C):	-10.00 °C
2nd impeller diameter (mm):	0.00	IE:	IE3-85.9
Motor type:	IM	Weight (kg):	41.930

MATERIALS

Pump Casing:	Cast iron GJL 200 EN 1561	Shaft:	Cr-Ni steel 1.4305 EN 10088 (AISI 303)
Lantern Bracket:	Cast iron GJL 200 EN 1561	Mechanical Seal:	Carbon-Ceramic-NBR
Impeller:	Brass P-Cu Zn 40 Pb 2 UNI 5705		

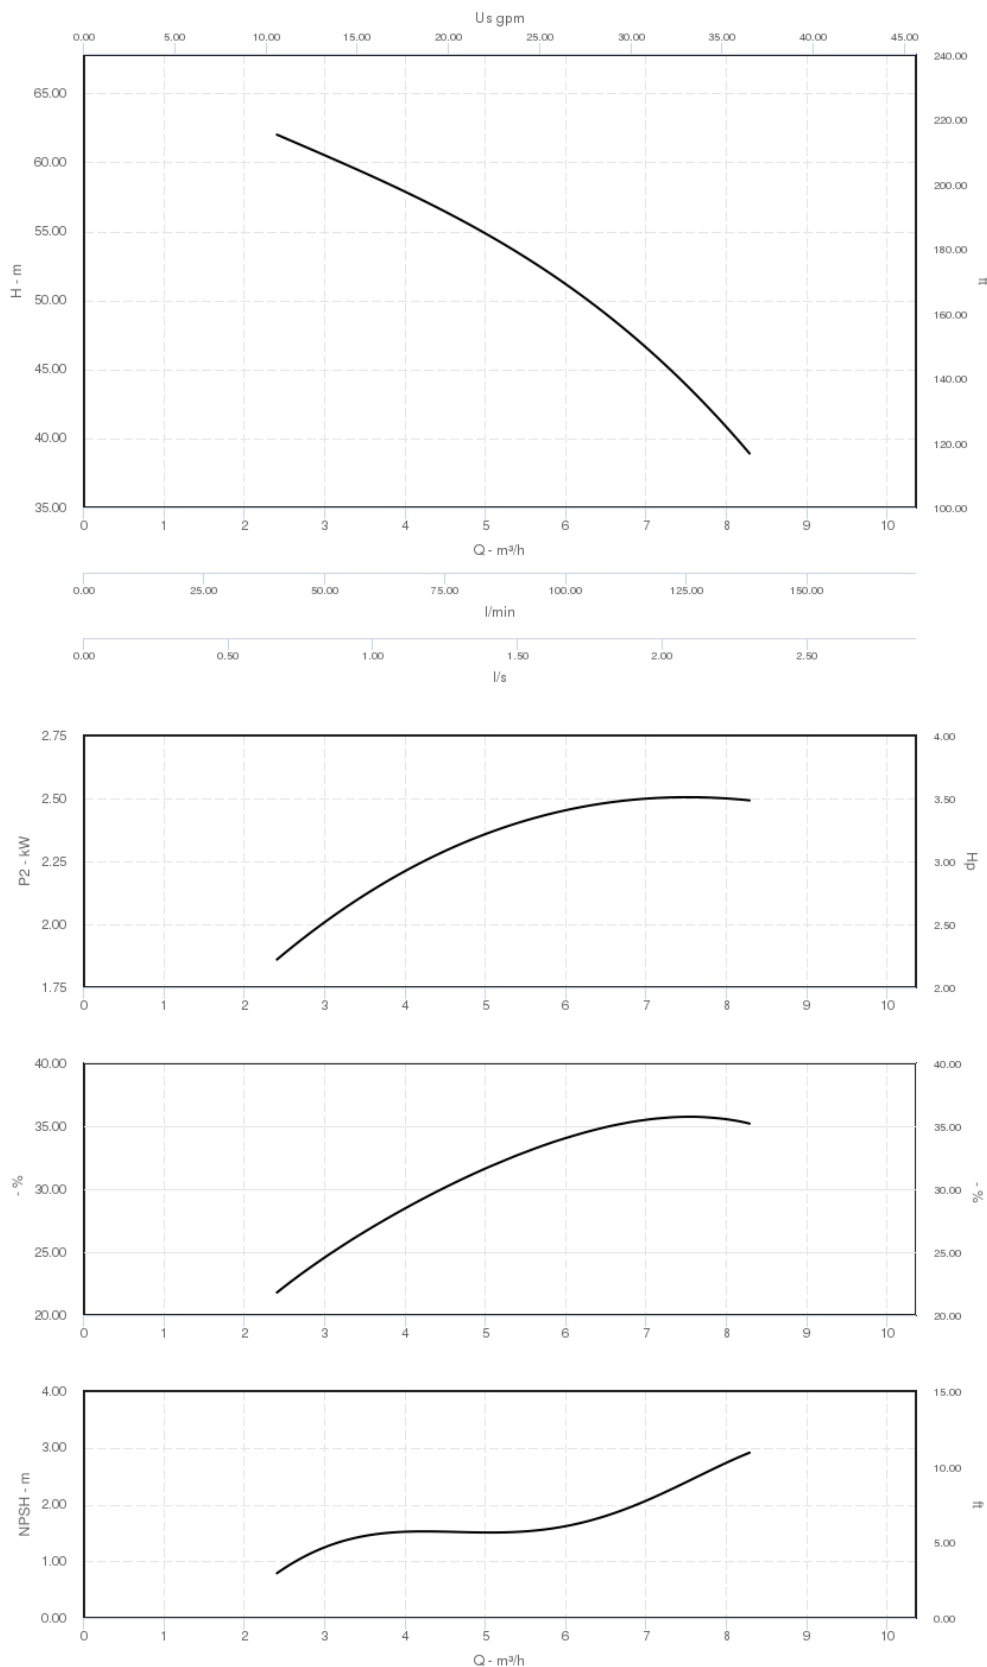

Data: 02/05/2019

Tel: 0268.33.47.47 / 0722.244.944

Email: vanzari@calpeda.ro

Web: www.calpeda.ro

60200073000: NMD 25/190C/B 230/400/50 HZ

DIMENSIONS (MM)

dn1: G 1 ½
dn2: G1
a: 97.00 mm
m1: 100.00 mm
m2: 70.00 mm
n1: 240.00 mm
n2: 190.00 mm
n3: 50.00 mm
b: 50.00 mm
l1: 133.00 mm
l2: 133.00 mm
g1: 13.00 mm
h1: 140.00 mm
h2: 180.00 mm
w: 314.00 mm
fm: 487.00 mm

